




TEKASOL

Zinc 98%

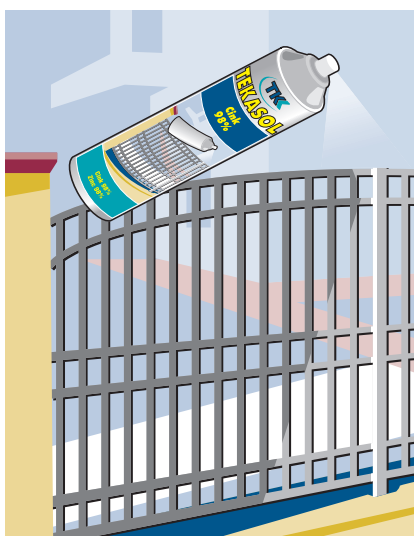

Protective coating for metal.

PROPERTIES

- It chemically solidifies producing a hard and long lasting surface coating that protects metal surfaces from corrosion and atmospheric agents such as salt and water.
- It can be varnished or left as a final protection of metal surface.

USE

- It is suitable for protection of welded galvanized parts.
- Optimal temperature for use is from 20 to 25°C.

TECHNICAL DATA

Colour: silver liquid
 Odour: characteristic (solvent like)

APPLICATION

Surface must be clean and dry. Shake can well until metal balls can be heard. After that continue to shake for 1 minute. Hold the can 15 to 20 cm from the surface that is going to be protected. For optimal results, we recommend two layers.

PACKING

- aerosol can of 400 ml

STORAGE

24 months (+10°C to +20°C).
 Cans should be stored in upright position.

SAFETY PRECAUTIONS

Contains Xylene.
 Extremely flammable. Harmful. Harmful by inhalation and in contact with skin. Irritating to skin. Harmful to aquatic organisms, may cause long-term adverse effects in the aquatic environment. Do not breathe spray. Avoid contact with eyes. Wear suitable protective clothing and gloves. In case of fire, use water and foam. If swallowed, seek medical advice immediately and show this container or label. Use only in well-ventilated areas.
 Pressurized container: protect from sunlight and do not expose to temperatures exceeding 50°C. Do not pierce or burn, even after use. Do not spray on a naked flame or any incandescent material. Keep away from sources of ignition – No smoking. Keep out of the reach of children.

ATTENTION

The information supplied is accurate to the best of our knowledge and is based on reliable tests and practical experiences. Properties quoted are intended, as a guide and do not therefore constitute a specification. You should thoroughly test any application to be sure that product corresponds to the required performances.