

TEKAFLEX


MS MARINE DC

PROPERTIES

- Excellent adhesion on most materials - teak, wood, ceramics, marble, aluminium, iron, stainless steel, copper and various types of plastic (polycarbonate, polyester, polystyrene, PVC, etc.).
- Good output even at low temperatures.
- Does not slump in vertical joints.
- Good adhesion on moist surfaces.
- Excellent mechanical properties and hardness
- Once fully cured it can be sanded.
- Environmentally friendly; it is solvent, isocyanate and silicone free.
- Totally chemically neutral and odourless.
- Can be painted with most paints and varnishes on the basis of epoxy, polyurethane and water.
- Shrinkage during hardening process below 1,5%.
- Resistant to atmospheric effects, UV-light and ageing.
- Does not cause corrosion.
- Chemical resistance
 - Good chemical resistance to: water, aliphatic solvents, mineral oils, fat, low concentration inorganic acids and bases;
 - Poor chemical resistance or not resistant to: aromatic solvents, concentrated acids, chlorinated hydrocarbons.
- Colour: black.

TESTS AND CERTIFICATES


Directive 2014/90/EU of 23 July 2014 on marine equipment (MED) MED B, MED D,



Notified Body No.:0575.

USE

It is suitable for sealing joints, seams and wall penetrations between different materials both on the deck and on the lower deck.

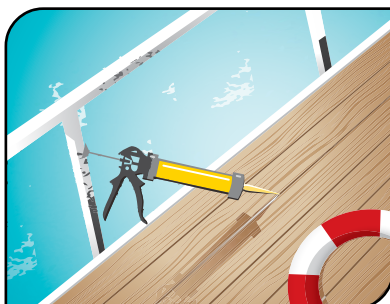

Tekaflex MS Marine DC

It is a one-component sealant on the basis of a hybrid MS polymer. It is suitable for sealing joints and seams between different materials both on the deck and lower deck. It hardens by air humidity without shrinkage and bubble formation. Once fully cured, it can be sanded.



UV resistance



Easily painted



Flexibility

TECHNICAL DATA

Fresh sealant

Base		hybrid MS polymer
Appearance		paste
Colour		black
Curing mechanism		by air humidity
Specific gravity		1400±30kg/m ³
Skin formation time	23°C/50% rel. humid.	25±5min.
Hardening time	23°C/50% rel. humid.	2–3mm/day
Application temperature		between +5°C and +30°C

Cured sealant

Hardness Shore A	ISO 868	40–45
Change in volume	ISO 10563	<1,5%
Tensile strength	ISO 8339	0,9–1,3MPa
Module E 100%	ISO 8339	>0,7 MPa
Elongation at break	ISO 8339	150–250%
Tensile strength	ISO 37	1,6–1,8MPa
Elongation at break	ISO 37	250–350%
Temperature resistance		between -40°C and +90°C

APPLICATION

Prior to use it is recommended to perform an adhesion test to verify adhesion of the sealant to the substrate.

Surface preparation

- The surface of the joint must be dry, hard, clean, dust and fat free.
- Remove all separated and badly attached pieces.

Joint and cartridge preparation

- Use Primer KVZ 15 for good adhesion onto teak, and Primer KVZ 16 for good adhesion onto porous concrete surfaces (see technical data sheet Primers).
- If you want joints to look nice tape the edges with a masking tape.
- Cut the cartridge at the top and screw on the nozzle, which has to be cut according to the width of the joint and placed in the gun. During work interruption, release the handle on the gun and pull the piston back.
- The sealant should be applied as evenly as possible.
- At the end, use a smoothing tool - a TTK smoothing instrument, or a Smoothing agent soaped finger to level the sealant before the skin starts to form. It is very important to press the sealant well against the surface to be sealed.
- Remove the masking tape before the sealant starts to harden.
- Fresh sealant and tools can be cleaned with the Tekafin cleaner, hardened sealant should be removed mechanically first and then with a cleaner for hardened silicone - Tekapursil S or Apursil.

Correct dimensioning of expansion joints

For optimal elasticity of a sealant the correct ratio width : depth is of extreme importance. The ratio is 2:1, 1:1 maximum. Sealant should not adhere to the bottom of the joint gap but only to its sides. This can be achieved with the use of Tekatrak Back filling tape (polyethylene foam, polyurethane). The minimum and maximum joint width is 6mm and 20mm, respectively.

PACKAGING

- 290ml cartridge
 - 600ml sausage
- Other packagings are available by agreement

STORAGE

12 months in dry space at temperature range between +5°C and +25°C, in originally closed packaging.

HEALTH, SAFETY HANDLING AND DISPOSAL INFORMATION

Additional information on safety, safe handling instructions and personal protective equipment as well as disposal information are available in a safety data sheet. Safety data sheet is available upon request. You can also ask your TKK distributor for a copy.

WARNING

Instructions contained in this document are based on our research and experience, however, due to specific conditions and working methods we recommend that you perform preliminary tests prior to any application of our products.